


CUSTOMER'S SINGLE PHASE,  
THREE WIRE 120/240VAC SOURCE  
WITH GROUND

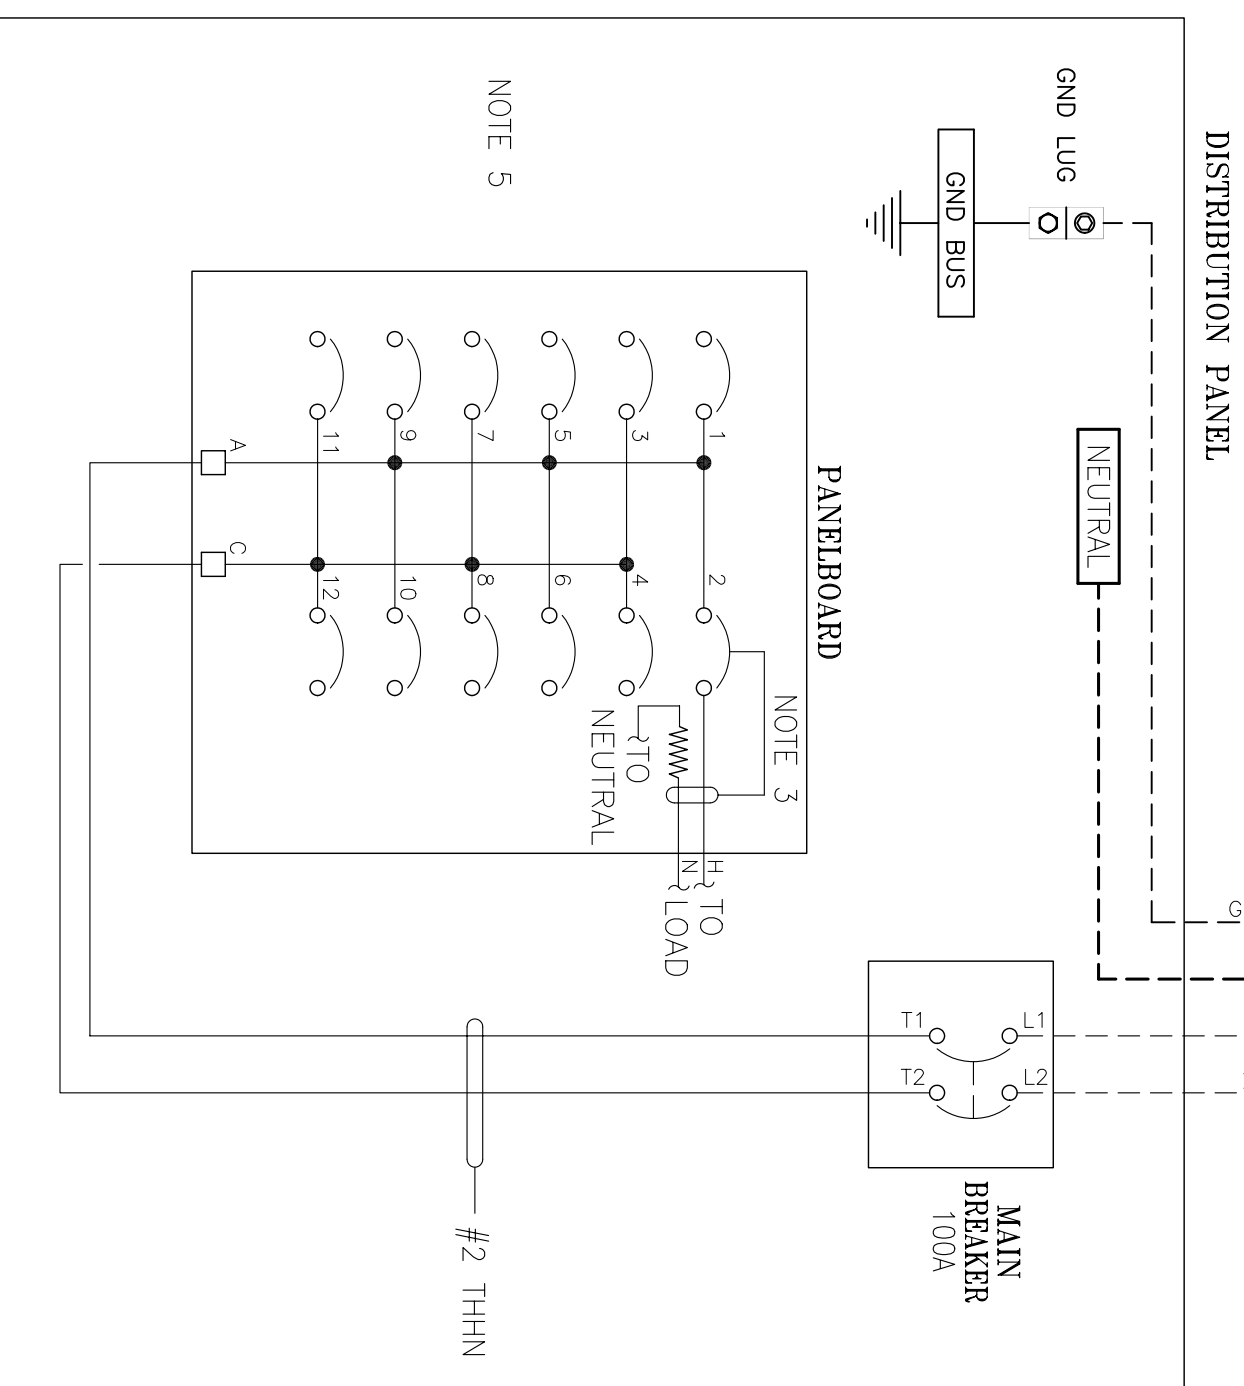

- NOTES:**
1. ALL WIRE TO BE # 14 TYPE SIS, UNLESS SHOWN OTHERWISE.
  2. ALL WIRE TO HAVE INSULATION SPADE TYPE LUGS AND NATVAR TUBING WITH PRINTED WIRE NUMBERS. OMIT THE LUG ON THE COMPRESSION OR SADDLE TYPE TERMINAL.
  3. THIS PANELBOARD CAN USE EITHER STANDARD OR GFI BREAKERS. BREAKER #2 IS AN EXAMPLE OF A GFI BREAKER.
  4. DASHED LINES INDICATE FIELD WIRING.
  5. PANELBOARD WILL ACCEPT EITHER PLUG-IN OR BOLT-ON BREAKERS, BOLT-ON ARE STANDARD.

COMPANY CONFIDENTIAL—INFORMATION CONTAINED HEREIN IS CONFIDENTIAL, IT IS THE PROPERTY OF GENERAL SIGNAL CORPORATION, IT IS TO BE USED SOLELY FOR THE PURPOSE PROVIDED, AND IT IS NOT TO BE DISCLOSED TO OTHERS WITHOUT PRIOR WRITTEN CONSENT OF EGS CORPORATION.

REVISION	DATE	RO ISSUED FOR	MANUFACTURE
			DMB 8/17/00

WIRING DIAGRAM		REF: GD398	DATE
DISTRIBUTION CONTROL PANEL (1PH)		DSGN: DMB	8/17/00
12 CIRCUIT 240VAC, 100A MAX. NEMA 12, 4, 4X		APPD: DMB	8/17/00
CATALOG #DP12NC		DOC#: GB582	
CLASS 305		SC: NONE	D/L

CONFIDENTIAL PROPERTY OF <b>NELSON HEAT TRACING SYSTEMS</b> TULSA, OK, USA		GB582
PHONE (918)627-5530	FAX (918)622-9308	R 0