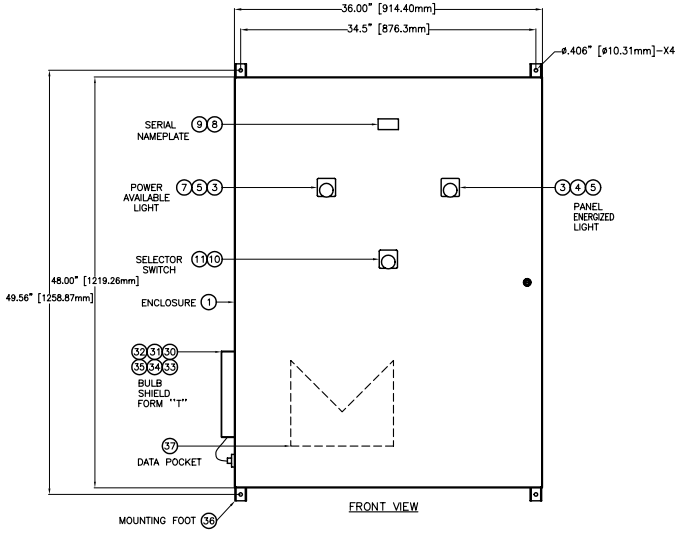

FRONT VIEW

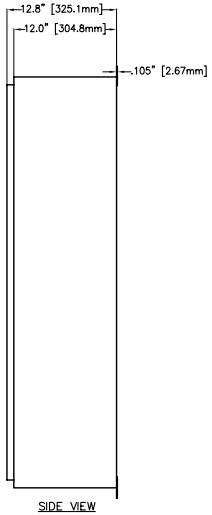

SIDE VIEW

NON-DISCONNECT ENCLOSURE

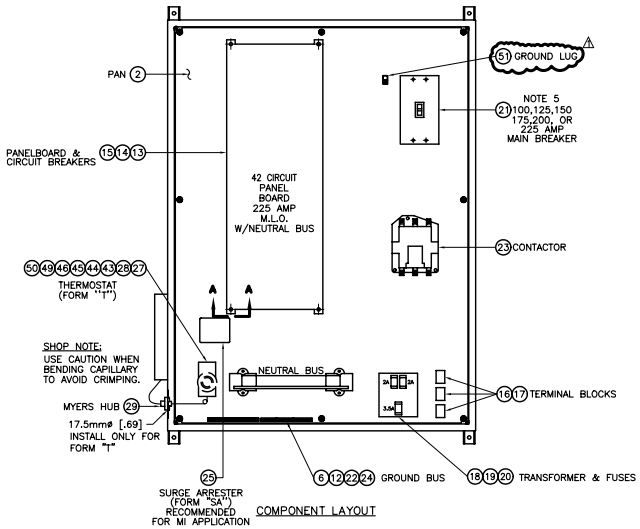

COMPONENT LAYOUT



VIEW A-A
PANELBOARD MTG.

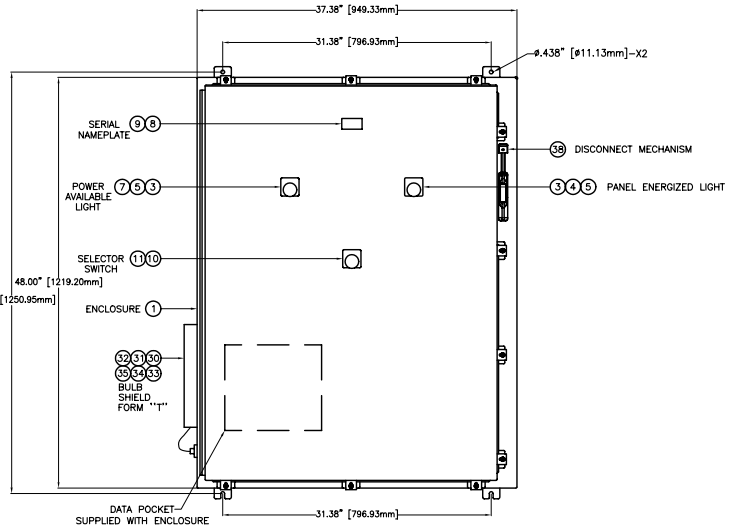

FRONT VIEW

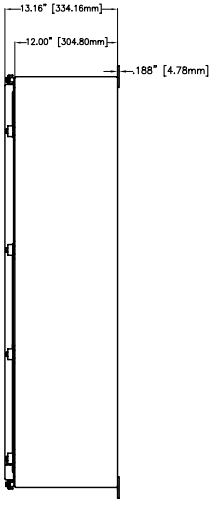

SIDE VIEW

DISCONNECT ENCLOSURE

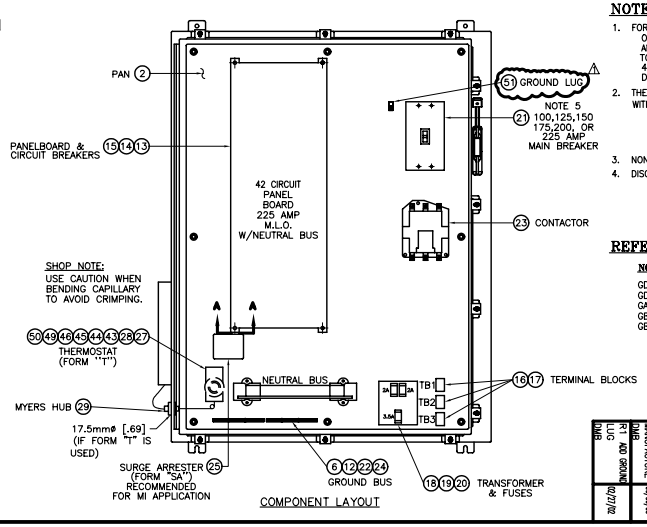

COMPONENT LAYOUT

NOTES:

1. FOR THE NON-DISCONNECT ENCLOSURE, THE CUSTOMER HAS TWO CHOICES OF ENCLOSURE MOUNTING. EXTERNAL MOUNTING FEET CAN BE INSTALLED AND MOUNTING DIMENSIONS WILL BE AS SHOWN. IF THE CUSTOMER CHOOSES TO USE INTERNAL MOUNTING, VERTICAL MOUNTING DIMENSION IS 46.5", AND HORIZONTAL MOUNTING REMAINS AT 34.5". THESE STATEMENTS DO NOT APPLY TO THE DISCONNECT ENCLOSURE PRODUCT.
2. THE BASE PRODUCT IS OFFERED IN THE NON-DISSCONNECT ENCLOSURE WITH BOLT-ON BREAKERS. AVAILABLE OPTIONS ARE:
   1) FORM D - DISCONNECT ENCLOSURE
   2) FORM T - INTERNAL THERMOSTAT
   3) FORM SA - SURGE ARRESTER
3. NON-DISCONNECT ENCLOSURE AVAILABLE IN NEMA 12 & 4, 4X.
4. DISCONNECT ENCLOSURE AVAILABLE IN NEMA 12 & 4, 4X.

REFERENCE DRAWING

NON-DISCONNECT ENCLOSURE		DISCONNECT ENCLOSURE	
GD-395	WIRING DIAGRAM 3ø	GD-395	WIRING DIAGRAM 3ø
GD-393	WIRING DIAGRAM 1ø	GD-393	WIRING DIAGRAM 1ø
GA-1856	DOOR MACHINING	GA-1857	DOOR MACHINING
GB-578	FIELD WIRING (3ø)	GB-578	FIELD WIRING (3ø)
GB-527	FIELD WIRING (1ø)	GB-527	FIELD WIRING (1ø)

COMPANY CONFIDENTIAL-INFORMATION CONTAINED HEREIN IS CONFIDENTIAL. IT IS THE PROPERTY OF GENERAL SIGNAL CORPORATION. IT IS TO BE USED SOLELY FOR THE PURPOSE PROVIDED, AND IT IS NOT TO BE DISCLOSED TO OTHERS WITHOUT PRIOR WRITTEN CONSENT OF GENERAL SIGNAL CORPORATION.

BRG	02/12/02	REVISION	REF: ø-35/ø-36 DATE
MFG	06/06/00	ISSUED FOR MANUFACTURE	DSGN: DMB 06/06/00
			APPD: DMB 06/06/00
			DOC#: GD0391
			CAT# API42PC / API42NC CLASS: 305 SC: NONE D/L

ASSEMBLY
INTERNATIONAL AMBIENT CONTROL PANEL
42 CIRCUIT 415/240VAC MAX. NEMA 12&4, 4X

CONFIDENTIAL PROPERTY OF
NELSON HEAT TRACING SYSTEMS
TULSA, OK, USA
PHONE (918)627-5530 FAX (918)622-9308

GD-391 R 1